



The V320i thermal transfer printer

Industry-leading speeds, versatility and economy



The highest performing and most cost effective coding solution for flexibles and labels.

Domino. Do more.

The ultimate in Thermal Transfer coding

The **V320i** prints large area, high resolution codes, text and images on flexible foils, films and labels

Domino's innovative **i-Tech** Ribbon Drive ensures the fastest printing speeds, allowing us to match or even exceed speeds of the fastest horizontal and vertical packaging machines, labellers and label converters.

With the largest ribbon rolls in the industry and unique ribbon save features, the **V320i** also delivers the lowest cost of ownership of all thermal transfer printers.

The **V320i** is also fully flexible, allowing you to choose whether you want to run in intermittent or continuous mode, left or right handed. It also lets you use your own user interface without the need for a dedicated controller.

A diverse range of applications



Large area printing of variable data onto papers, films and labels



Change ingredient listings or similar to customise a generic packaging film for many uses



Print crisp clean text, logos and machine readable codes at the fastest speeds



Reliable printing in cold environments and excellent code adhesion – even after freezing



Greener credentials

Domino's commitment and investment in sound environmental practices means we frequently exceed the demanding governmental, industry and company standards and regulations. We are committed to minimising the consumption of natural resources and energy and the creation of waste. Additionally, our products are RoHS and WEEE compliant so that they are recyclable.

Fastest printing speeds in the industry



Accurate


The **V320i** prints complex data incredibly clearly and consistently across the full operating range – with an impressive speed range (from 10 to 1400mm/sec) and a high print repeat rate (up to six prints per second).

Clever

Domino's ground-breaking **i-Tech** Ribbon Drive incorporates our unique 'Dancing Arm' tension control. This keeps the ribbon in perfect tension even when under high acceleration, enabling you to print at the highest production speeds.



Easy to configure to match your application



Versatile

Designed to be fully-flexible, the **V320i** serves the widest range of applications. You can use the same printer in both Intermittent Mode (IM) and Continuous Mode (CM) cover the complete print speed range, and also easily convert between left- and right-handed positioning.

A full range of ribbons is available, complying with the latest legislative and environmental standards.

You can also use the **V320i** without a dedicated controller: Just connect to any PC based interface, including laptop or host packaging machine interface, to meet the needs of your application.

Capable

At 300dpi, the **V320i** tackles text, logos, dynamic bar codes and 2D codes with ease and can link seamlessly with a database if necessary. Two print head width options (53mm and 128mm) offer the widest range of print areas.

Resilient

The **V320i** performs just as well in conventional, dusty, damp or cold environments thanks to the removable cover, which protects the print head against dust and condensation. The integrated heater ensures consistent code quality and improves print head life at low temperatures.

Lowest Total Cost of Ownership in the industry



Economical

Domino's **i-Tech** Ribbon Drive offers 4 ribbon save settings including 'Economy Mode' which allows you to use up to 60% less ribbon per print – without affecting print quality: a major saving in ribbon costs.



Efficient

1400m long ribbon rolls minimise the number of roll changes and downtime, and with Economy Mode, the effective length can more than double, halving the number of stoppages. During ribbon change, re-calibration is fast to get you printing again as quickly as possible.

Reliable and low maintenance

Ribbon breaks (and associated downtime) are virtually eliminated by **i-Tech's** unique 'Dancing Arms', which constantly maintain ribbon tension. They are also maintenance free so minimising any user intervention required.

Easy to use



QuickStep is our simplified operator user interface for effortless control and status reporting. No complex menus or parameters, just enter the job and away you go.

WYSIWYG message selection ensures quick and easy job changes without mistakes.



Built-in label creation software means you can create code formats on the line. Alternatively, you can design them on a PC using **EasyDesign** or other compatible label creation packages, and transfer via USB or Ethernet.

Domino. Do more.

A quick tour around the V320i

Optional wall mounted **TouchPanel**, designed to IP55 standards – Alternatively use any PC based interface

QuickStep graphical user interface for effortless control and status reporting




Continuous and Intermittent Mode functionality in one printer – suitable for all applications

Proven 'Dancing Arm' technology allows printing at the fastest line speeds, ensuring no ribbon break related downtime

1400m ribbon rolls for the longest production runs without replacement

i-Tech Ribbon Drive reduces ribbon use by up to 60% without compromising code quality

Two print head width options (53mm and 128mm) offer wide range of print areas at 300dpi

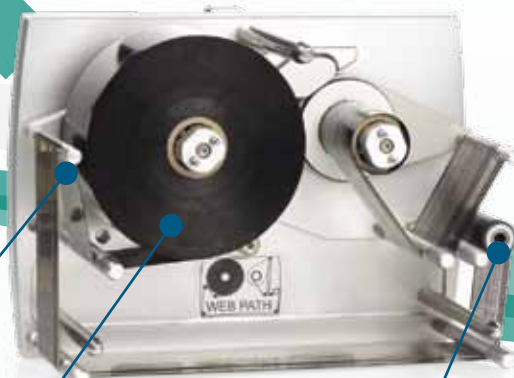

Our next generation of primary coders deploy our unique *intelligent Technology* system, **i-Tech**. Our aim was to make production lines lower maintenance, lower cost and more efficient. **i-Tech** has helped us to achieve that aim.

Domino. Do more.

Technical Specification:

| | V320i (53mm) | V320i (128mm) |
|---|--|-------------------------------|
| Printer Specification | | |
| Printing Modes | Intermittent Mode (IM) and Continuous Mode (CM) in the same printer | |
| Left hand / Right hand | Both options available (convertible within 30 minutes) | |
| Print resolution | 300 dpi | |
| Maximum print area (IM) | 53mm x 115mm | 128mm x 115mm |
| Maximum print area (CM) | 53mm x 2700mm | 128mm x 1000mm |
| Print speed (max) (IM) | 720mm/* | |
| Speed range (CM) | 10mm/s – 1400 mm/s* | |
| Print repeat rate (max) | 6 prints/s (with a 10mm long print)* | |
| Ribbon drive technology | i-Tech Ribbon Drive with unique Dancing Arm tension control | |
| Max ribbon length | 1400m (up to 3500m effective length with Economy Mode) | |
| Standard Ribbon widths | 30mm, 55mm | 130mm |
| Ribbon save modes | | |
| Economy mode | Variable in 1% increments up to 60% | |
| Retraction mode | Less than 1mm gap between prints | |
| Column mode | Yes | |
| Stop mid print | Yes | |
| Print features | | |
| Date code format | Yes | |
| Offsets | Yes | |
| Shift codes | Yes | |
| Serial number generation | Yes | |
| Fonts | Yes | |
| Dynamic bar codes | Yes | |
| 2D codes | Yes | |
| Database linking | Yes | |
| Graphical User Interface | QuickStep , full colour Interface Intuitive navigation via large, easy to read buttons and Icons. WYSIWYG print preview. Multi-language support | |
| Controller options | No dedicated controller required. Hardware Interface options: <ul style="list-style-type: none"> • Domino TouchPanel via Ethernet cable or network • Domino TouchPad via Ethernet cable or network • PC based interface via Ethernet cable or network | |
| Connectivity | Ethernet, USB, SD card and Mini USB (for service) | |
| Inputs | Print Go, Encoder | |
| Outputs | Error, Ready (software configurable) | |
| Special features | Master slave, password, fastmode, macros, Labelspeed | |
| Label creation | Onboard and via EasyDesign (included) | |
| Electrical requirements | 115/240 VAC, 50/60 Hz, 300 VA | |
| Compressed air requirements | 0.3ml / Print (6 Bar Max) 0.5ml / Print (6 Bar Max) | |
| Dimensions | W 262mm x H 190.3mm x D 220mm | W 262mm x H 190.3mm x D 295mm |
| Weight | 12kg | 13.5kg |
| TouchPanel Specification | | |
| Type | 10.4 inch, full colour touchscreen (800x600 resolution) VESA mountable with optional brackets | |
| I.P. Protection | Designed to IP55 | |
| Connectivity | 2 x USB, Ethernet | |
| Electrical requirements | 115/240 VAC, 50/60 Hz | |
| Dimensions | W 305mm x H 230mm x D 78.8mm | |
| Weight | 4kg | |
| TouchPad Specification (not illustrated) | | |
| Type | 5.7 inch, full colour touchscreen (640x480 resolution) Handheld with docking station included | |
| Connectivity | Ethernet (for connection to printer or Network), USB | |
| Electrical requirements | Powered via universal Mini USB power adapter (supplied) 115/240 VAC, 50/60Hz input | |
| Dimensions | W 170.0mm x H 127.9mm x D 33.7mm (excluding docking station) | |
| Weight | 0.4kg | |
| PSU Specification | | |
| Dimensions | W 171.6mm x H 84.6mm x D 273.9mm | |
| Weight | 2.45kg | |
| Environmental requirements | Temperature: 5°C to 40°C. Humidity: 20-80%, non condensing | |

*Note: Print capability is dependent upon application and substrate type.

