




Tamp Print & Apply Labelling

Flexible - configurable for all environments

Domino's standard Tamp units (M200-T100 4" and M200-T150 6") provide a flexible multi-purpose Print & Apply solution that suits many applications within box and product labelling meeting demands for both accuracy and speed.

Providing you with a reliable, robust and easy to use design to give you continuously reliable labelling for many years to come - even in the most harsh industrial environments.

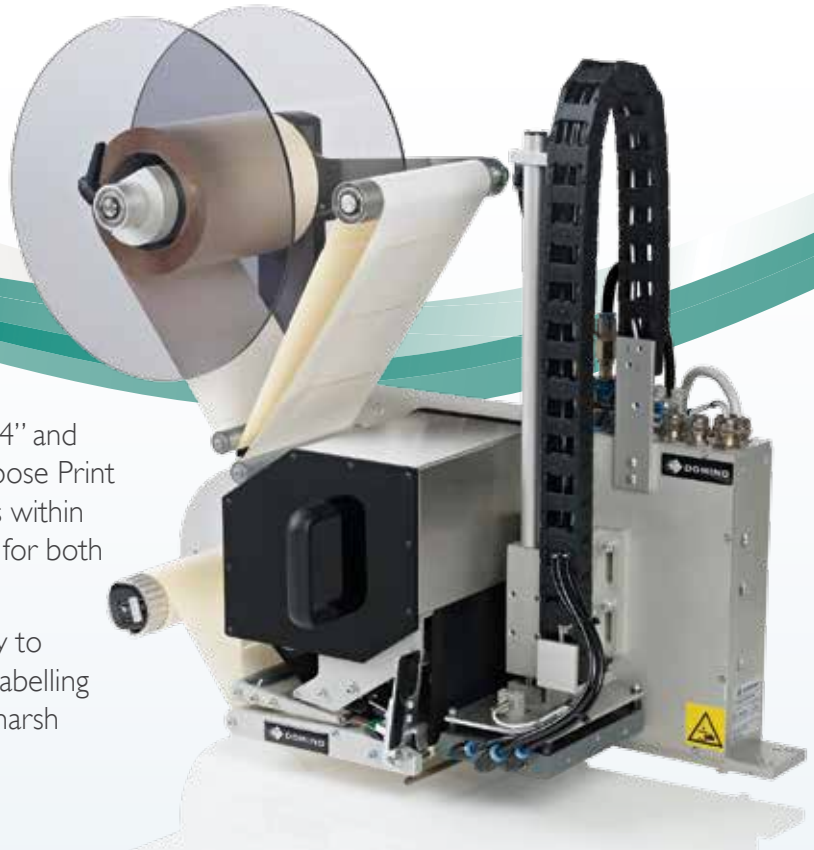

Flexibility - versatile configuration

An easy-to-use system with both left-and right-hand versions as standard and modular design to suit your production line. Our unique pad allows for different label materials and sizes to be used without the need for time-consuming changes.

Reliability - reliable and compact

Reliability in your production environment is assured with its robust construction, and the compact design allows easy integration into your existing lines.

Convenience - saves time

Fast consumable changes are assured with ribbon and label low alerts, a collapsible core for rapid label backing removal and an easy-to-clean print head.

Assured Compliance - offers peace of mind

Supply chain compliance with full GSI coding capability at high resolution including bar codes, text and graphics and the open approach system enables easy communication and integration into your network.

Domino. Do more.

Benefits of Tamp Applicator


- Flexible multi-purpose Print & Apply solution
- Labelling of moving or stationary products
- Accurate & consistent label position
- Easy and fast consumable changes
- Side, top or bottom labelling
- Applies last label printed
- Industrial robust design
- Left and right hand versions as standard



Technical Data - Standard Tamp Options

Print technologies:	Thermal Transfer Optional - Direct Thermal or Label only
Print resolutions:	12 dots/mm (300dpi) Optional - 8 dots/mm (200dpi)
Typical speeds:	40-80 labels per min
Label sizes:	Up to 150 x 210 mm*
Distance to product:	Up to 560mm*
Pneumatics:	6 bar compressed air
Communication interface:	2 x RS232, 1 x USB 2.0, Ethernet (optional) 31 inputs (PNP), 21 (NPN) + 10 (relay) outputs
User interface:	Graphical display with 25 languages
Overall Dimensions:	668 x 516 x 243 mm (Printer & Applicator min) 668 x 858 x 314 mm (Printer & Applicator max) 406 x 278 x 129 mm (Controller - PCU)

* Larger labels and longer stroke lengths are available - details on request.

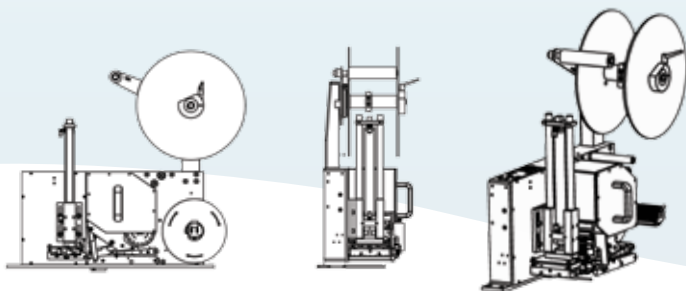

www.domino-printing.com

MSTMP/0113 We reserve the right to change the design or specification of our products without notice. Some of the information contained in this brochure is general in nature and customers should check that it is applicable to their individual circumstances.

