



Wipe and Reverse Wipe

Versatile, high speed labelling


Domino's standard Wipe units (M200-WI100 and M200-WR100) provide multi-purpose Print & Apply solutions that suit many applications for box and product labelling.

Wipe Applicator

The simple movement in the M200-WI100 is ideal for your high-speed applications across a wide range of industries.

Reverse Wipe Applicator

The M200-WR100 reverse wipe applicator gives you the option of variable length labels with no extra setup: giving you the necessary flexibility for today's market requirements.

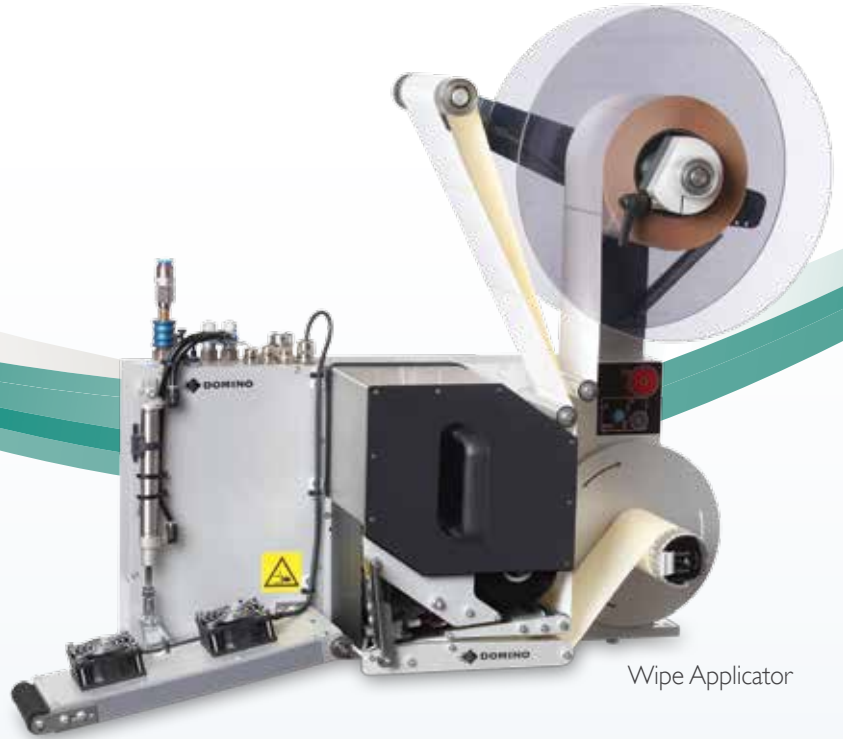

Wipe Applicator

These solutions provide you with a compact and robust design for continuously reliable labelling for many years to come - even in the most harsh industrial environments.

Flexibility - versatile configuration

An easy-to-use system with both left-and right-hand versions as standard and modular design to suit your production line. Our unique pad allows different label materials and sizes to be used without the need for time-consuming changes.

Reliability - reliable and compact

Reliability in your production environment is assured with its robust construction, and the compact design allows easy integration into your existing lines.

Convenience - saves time

Fast convenient consumable changes are assured with ribbon and label low alerts, a collapsible core for rapid label backing removal and an easy-to-clean print head.

Assured Compliance - offers peace of mind

Supply chain compliance with full GSI coding capability at high resolution including bar codes, text and graphics and the open approach system enables easy communication and integration into your network.


Domino. Do more.

Wipe / Reverse Wipe

- Standard Wipe or Reverse Wipe applicator
- Variable label lengths with Reverse Wipe
- High speed labelling
- Industrial robust design
- Easy and fast consumable changes
- Side, top or bottom labelling
- Left and right hand versions as standard



Reverse Wipe Applicator

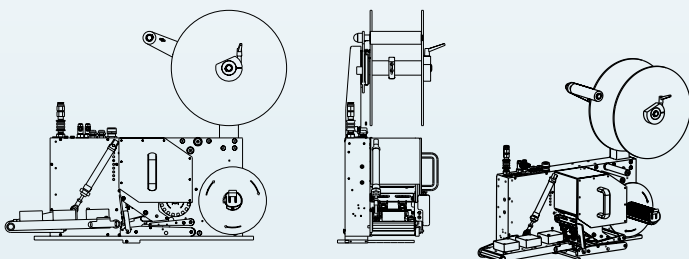

Technical Data - Wipe/Reverse Wipe

Print technologies:	Thermal Transfer Optional - Direct Thermal or Label only
Print resolutions:	12 dots/mm (300dpi) Optional - 8 dots/mm (200dpi)
Typical speeds:	30 - 50 labels per min (depending on label size) Higher speed wipe options available - details on request.
Label sizes:	Up to 110 x 300 mm
Distance to product:	Up to 90 mm
Pneumatics:	6 bar compressed air
Communication interface:	2 x RS232, 1 x USB 2.0, Ethernet (optional) 31 inputs (PNP), 21 (NPN) + 10 (relay) outputs
User interface:	Graphical display with 25 languages
Overall Dimensions:	685 x 516 x 243 mm (Printer & Applicator min) 745 x 616 x 314 mm (Printer & Applicator max) 406 x 278 x 129 mm (Controller - PCU)

