

## X<sup>4</sup> SpaceSaver **X-ray Inspection Systems**

www.loma.com

Versatile, proven X-ray detection for the food and packaging industries



- Versatile Models and reject systems to suit a wide range of packaged product
- Easy to use Intuitive full colour touch-screen
- Sensitive High performance, auto configuring contaminant detection algorithms
- Fast Belt speeds up to 40m/min with optimum performance
- Reliable Heavy duty conveyor components, built for 24/7 operation



## X-ray Inspection Systems

Finish: 304 stainless steel with brushed finish

Typical Line Height: 900mm ± 50mm

System Length: 1150mm

Belt Width: 300/500mm

Maximum Weight 10Kg

Supply Voltages: 230/1ph/50Hz N+E or 110/1ph/60Hz N+E

Air Supply: 5 to 8 bar
Reject Options: Signal only
Environment: IP 55


Belt Type: Flat (food quality) belt

Standard Inclusions: Height adjustable feet, Missing product, Image and report

archiving, Hinged interlocked covers, Variable speed

Options: Reject confirmation, Bin full sensing, Survey meter,

Remote diagnostics, Lockable wheels, LomaEnet

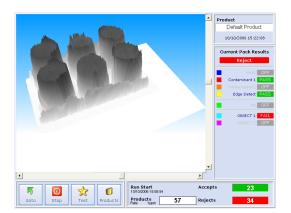

## **Technical Specification**

Industrial Grade PC with modem, Ethernet and front access USB port

Embedded Windows XP operating system

Digitally controlled WASC (Wide Angle, Self Cooled) high performance X-ray tank. (Tube life estimated at 7 to 10 years)

Unique USB high speed, high stability, detector array with 0.8mm diode pitch.

Computer vision system utilising image processing and morphological techniques


Pass Key protected set-up

USB Report and image archiving

Full diagnostic and system health monitoring with date and time stamp archiving, including remote support tools

Usage monitoring with planned maintenance prompts

Modular system with speed digital communications between major components

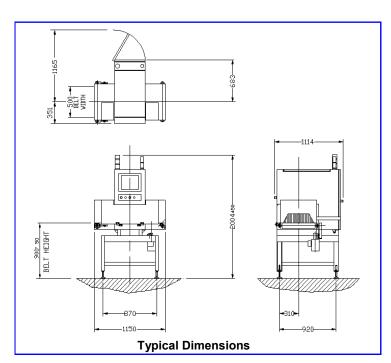

Loma Systems, Summit Ave, Southwood, Farnborough, Hampshire, GU14 0NY

